


## Quick Start

Do not leave the battery and charger unattended while in use. Do not operate the charger near water. It is the users responsibility to follow battery mfg. suggested charging rate. Users must also closely monitor the pack temperature during fast charging. Overcharging may occur if the 16X3 malfunction or, when user does not follow battery mfg. recommended charge rate. Never connect the charger to an automobile while its engine is running. This charger is not intended for use by unsupervised children. This charger is designed for R/C car high power Ni-Cd battery only. When charging, also monitor the temperature of the charger. If the unit becomes too hot, disconnect the unit.



110-120V AC CORD INPUT CONNECTION

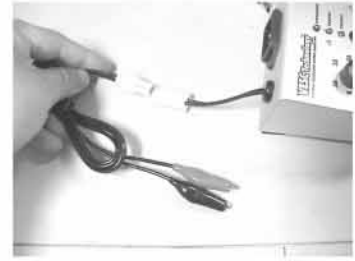

12V DC CORD INPUT CONNECTION



CONNECT TO A 4-7 CELL PACK (sub-c size only)



PRESS START TO FAST CHARGE (REPEAK)



THIS PLUG IS FOR TX/RX SLOW CHARGE

Warning! Certain JR radios have reversed polarity.